

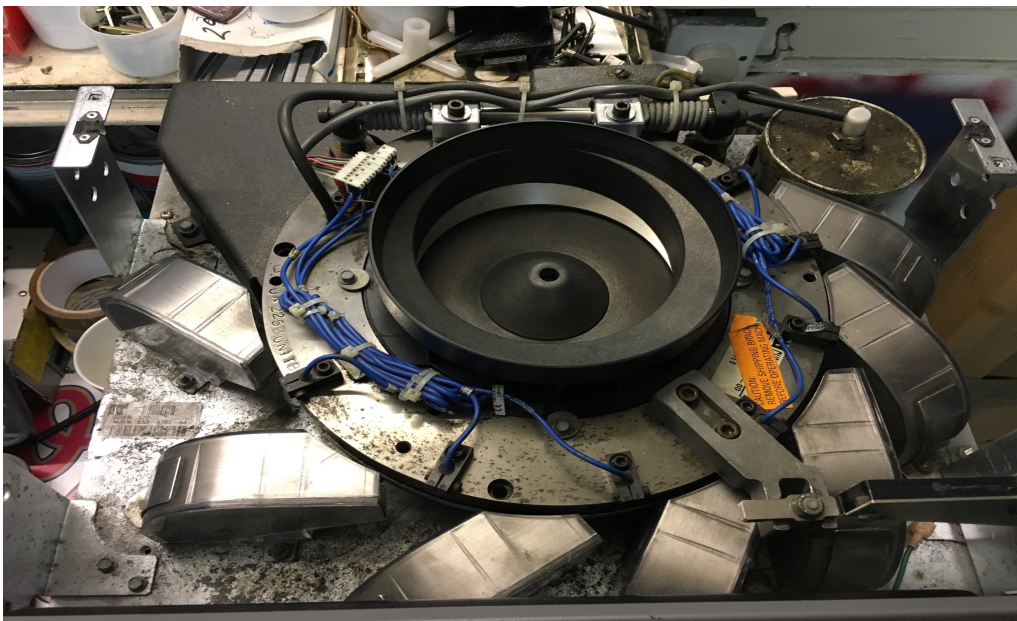


## JETSORT HEAD REMOVAL


Remove 4 screws and remove cowling

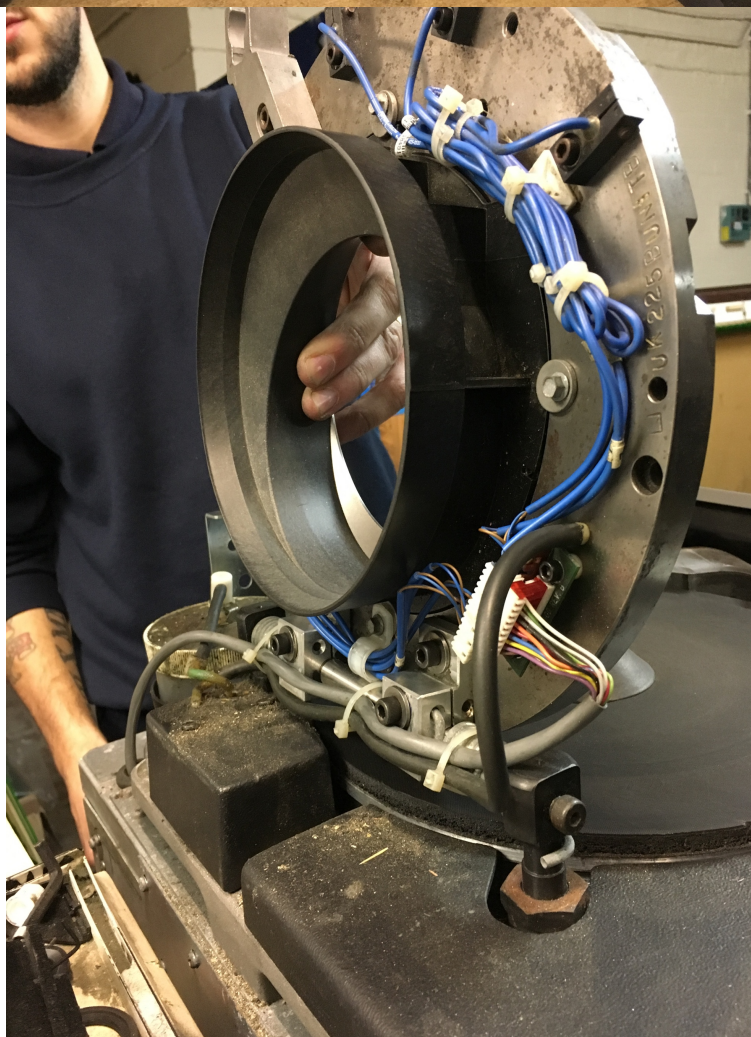

Remove 4 bolts on spring loaded hinge with Allen key the easiest way to do this is with the head in an upright position as shown

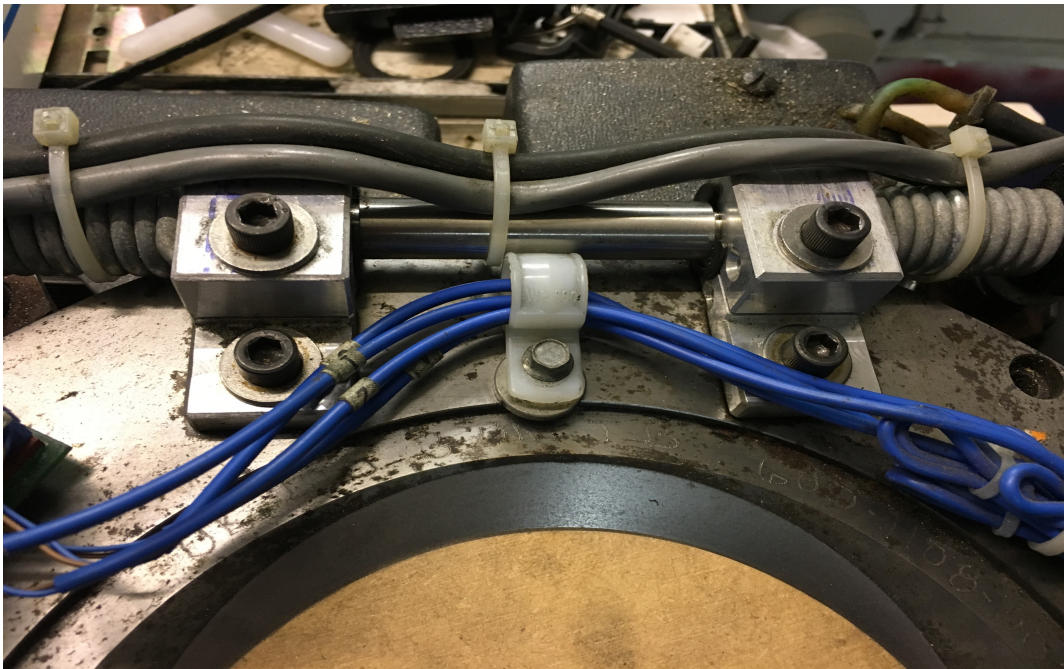

Once head is removed then take off all brackets and sensors with Allen key

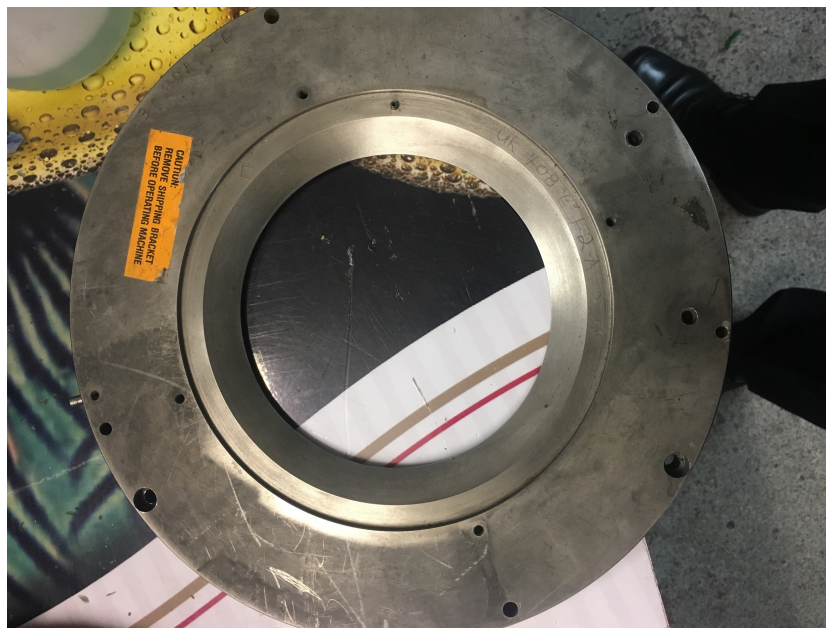

The head is now ready to ship to  
J E Sheeran AA Ltd  
18 Argyle Street, Stonehouse, Lanarkshire, ML9 3LL  
Telephone 01698 792711  
[Edward@sheeran.co.uk](mailto:Edward@sheeran.co.uk)

